



PRODUCT PREVIEW

EXTREME VR1

Universal, road legal, semi slick tyre with directional tread pattern. Type-R and Type-W versions are designed for rally/time attack usage in dry (R) and wet (W) conditions. These products are distinguished by reinforced sidewalls and high performance rubber compounds. That guarantees the highest level of grip. The other two versions (Type-S2 and Type-V2) are specially made for drift application. Depending on selected compound, these versions are great for both experienced and rookie drivers.

TECHNICAL SPECIFICATIONS

TABLE1: TYRES MODELS SPECIFICATIONS

Tyre Size	Load/Speed Index	Approved Rim width [inch]	Weight* [kg]	Tread Depth [mm]	Overall Diameter [mm]	Tread Width [mm] (measuring rim width [inch])
195/50 R15	82 H	6.0 / 6.5 / 7.0	9.0	6.5	577	200 (at 7J rim)
205/45 R16	83 V	6.5 / 7.0 / 7.5	9.0	6.5	590	200 (at 7J rim)
205/45 R17	84 V	6.5 / 7.0 / 7.5	10.0	6.5	615	200 (at 7J rim)
225/45 R17	91 V	7.5 / 8.0 / 8.5	11.5	6.5	632	220 (at 7,5J rim)
245/40 R17	91 V	8.5 / 9.0 / 9.5	12.0	6.5	625	240 (at 8,5J rim)
245/40 R18	93 V	8.5 / 9.0 / 9.5	12.5	6.5	650	240 (at 8J rim)
255/35 R18	90 V	9.0 / 9.5 / 10.0	13.0	7.5	634	260 (at 10J rim)
265/35 R18	93 W	9.5 / 10.0 / 10.5	13.0	7.5	646	265 (at 10J rim)

TABLE2: RUBBER COMPOUNDS SPECIFICATIONS

Version	Hard Sidewall Construction	Hardness	Application	Compound Operating Temperature [°C]	Treadwear Indication
TYPE - R	Yes	HARD	RALLY (DRY)	40 - 90	150
TYPE - W5	Yes	SOFT	RALLY (WET)	20 - 40	-
TYPE - W4	Yes	SUPER SOFT	RALLY (WET)	-5 - 20	-
TYPE - S2	No	SOFT	DRIFT	40 - 120	200
TYPE - V2	No	MEDIUM	DRIFT	50 - 130	250



PRODUCT PREVIEW

EXTREME VR2

A MODERN ROAD LEGAL SEMI-SLICK WITH ASYMMETRIC TREAD AND TIRE SHOULDER DESIGN. THE OUTSIDE STRUCTURE OF THIS TIRE INCREASES THE GRIP AND PRECISION WHILE CORNERING, WHEREAS THE INSIDE STRUCTURE PROVIDES MAXIMUM ROAD CONTACT ON THE STRAIGHT LINE. TOGETHER WITH REINFORCED SIDEWALLS AND RACING COMPOUNDS, THIS TIRE OFFERS SUPREME GRIP AND IMMEDIATE STEERING RESPONSE.

TECHNICAL SPECIFICATIONS

TABLE1: TYRES MODELS SPECIFICATIONS

Tyre Size	Load/Speed Index	Approved Rim width [inch]	Weight* [kg]	Tread Depth [mm]	Overall Diameter [mm]	Tread Width [mm] (measuring rim width [inch])
175/50 R13	72 H	5.0 / 5.5 / 6.0	7.0	5.0	505	175 (at 5,5J rim)
185/60 R13**	-	-	-	5.0	-	-
185/55 R14	80 H	5.5 / 6.0 / 6.5	-	5.0	552	183 (at 5,5J rim)
195/50 R15	82 H	6.0 / 6.5 / 7.0	8.5	5.0	574	195 (at 6J rim)
215/45 R17	87 V	7.0 / 7.5 / 8.0	10.0	5.0	625	207 (at 7J rim)
225/45 R17	91 V	7.5 / 8.0 / 8.5	-	5.0	630	218 (at 8J rim)
225/40 R18	88 V	8.0 / 8.5 / 9.0	12.0	5.0	635	230 (at 8J rim)
255/35 R18	90 V	9.5 / 10.0 / 10.5	-	5.0	632	258 (at 9J rim)

** - coming soon

TABLE2: RUBBER COMPOUNDS SPECIFICATIONS

Version	Hard Sidewall Construction	Hardness	Application	Compound Operating Temperature [°C]	Treadwear Indication
TYPE - R9	Yes	HARD	DRY SURFACE	40 - 100	200
TYPE - R7	Yes	MEDIUM	DRY SURFACE	30 - 80	140
TYPE - R5	Yes	SOFT	DRY SURFACE	20 - 50	80
TYPE - W4	Yes	SUPER SOFT	WET SURFACE	-5 - 20	-

RALLY TYRES / TIME ATTACK

VR2

TYRE SIZE	TYPE-W4	TYPE-W5	TYPE-R	TYPE-R5	TYPE-R7	TYPE-R9
175/50/13 72H	+			+		+
185/60/13	+			+		+
185/55/14 80H	+			+	+	+
195/50/15 82H				+	+	+
215/45/17 87V				+	+	+
225/45/17 91V				+	+	+
225/40/18 92V				+	+	+
255/35/18 90W				+	+	+
265/35/18 93W				+	+	+

VR1

195/50/15 82H	+	+	+			
205/45/16 83V	+	+	+			
205/45/17 84V	+	+	+			
225/45/17 91V	+	+	+			
245/40/17 91V	+	+	+			
245/40/18 93V	+	+	+			
255/35/18 90V	+	+				
265/35/18 93W	+	+				


VR2 NK - PREMIUM TYRES LINE BASED ON NEW CASINGS

VR2 NK

TYRE SIZE	TYPE-W4	TYPE-W5	TYPE-R	TYPE-R5	TYPE-R7	TYPE-R9
175/50/13 72H	+			+		+
185/60/13	+			+		+
185/55/14 80H	+			+	+	+
195/50/15 82H				+	+	+
215/45/17 87V				+	+	+
225/45/17 91V				+	+	+
225/40/18 92V				+	+	+
265/35/18 93W				+	+	+

COMPOUNDS WORKING TEMPERATURES

W4 - SUPERSOFT (WET), W5 - SOFT (WET), R - HARD
R5 - SOFT, R7 - MEDIUM, R9 - HARD

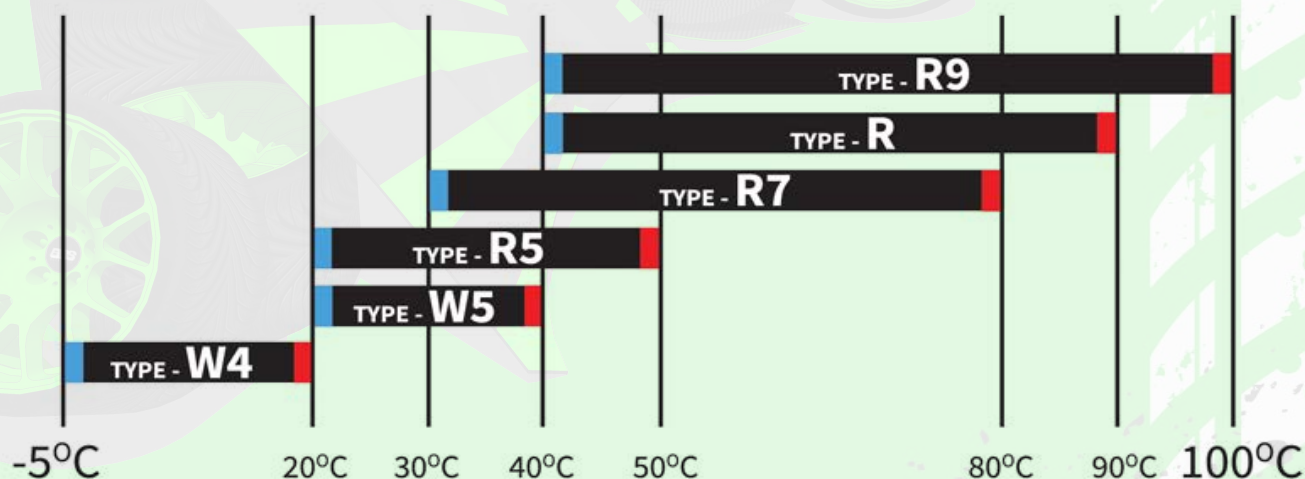

DRIFT TYRES



VR1

TYRE SIZE	TYPE-S2	TYPE-V2	TYPE-C
195/50/15 82H	+	+	
205/45/16 83V	+	+	
225/45/17 91V	+	+	
245/40/17 91V	+	+	+
245/40/18 93V	+	+	
255/35/18 90V	+	+	+
265/35/18 93V	+	+	

COMPOUNDS APPLICATION

TYPE-V2 - BASIC DRIFTING COMPOUND PROVIDING MEDIUM LEVEL OF GRIP, PREDICTABILITY, GOOD DURABILITY, CONSTANT WEAR AND A LOT OF SMOKE

TYPE-S2 - HIGH GRIP DRIFTING COMPOUND FOR PROFESSIONAL DRIVERS, OFFERS TOP CORNERING SPEED AND QUICK STEERING RESPONSE

TYPE-C - SPECIAL COMPOUND PROVIDING COLORED SMOKE, GIVES UNIQUE VISUAL EFFECTS AND ENTERTAINMENT FOR ALL SHOWS.

